
Johnson
LIFTS & ESCALATORS
A STEP UP
FOR EVERY
LUXURY
HOME


Johnson
LIFTS & ESCALATORS
PRESENTING
EAZY~RIDE
HOME ELEVATORS FROM JOHNSON



EAZY~RIDE

Car interior in wood patterned wall panels with contrasting steel patterned strips in corrosion-resistant, pre-coated steel.

The automatic side opening doors are in steel patterned corrosion-resistant, pre-coated steel. Vision panels are provided for safety. SS handrail at rear for comfort.

False ceiling in steel pattern, crafted from corrosion-resistant, pre-coated steel comes with power saving LED lights and cross flow fan. A warm brown Pergo floor completes the exclusive look.



Car fixture with braille buttons.

ADVANTAGES

Easy installation
Self support steel structure shaft
Machine room-less, gearless
Power saving
Short head room
Small pit
Single phase




A view with landing doors, showing the landing fixture in the door frame.



FEATURES

Capacity - 272 Kg
Speed - 0.2 mps
No of floors -3 (max)
Travel - 9 metres
Automatic side opening doors
Direct landing
Automatic Rescue Device
Emergency light & alarm bell
Infra red door curtain
Landing door frame narrow jamb
Manual safe landing operation
Light -3w LED
Control system - APB
Motor rating - 0.95 kW
Controls -VVVF
Voltage - AC 230 V single phase

Hoistway elevation

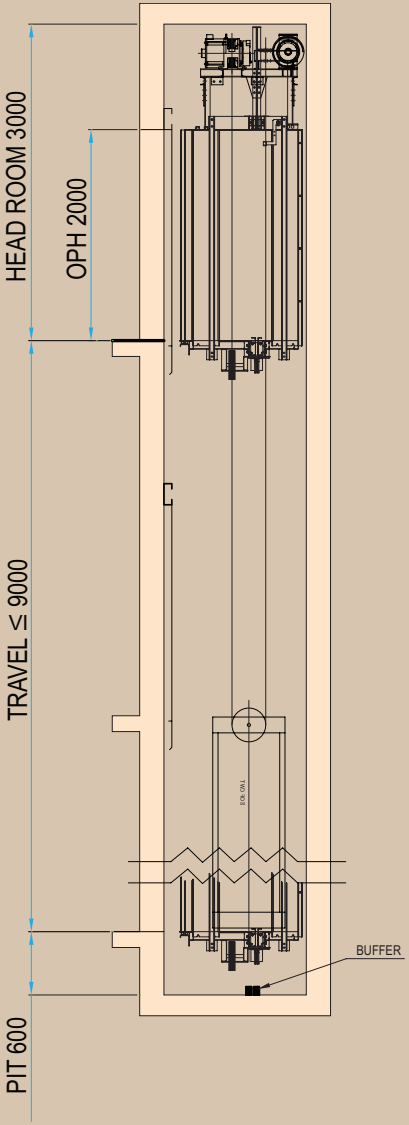

Note: All dimensions are in millimetres.

All dimensions are clear finished liftwells after plastering.

Dimensions are suitable for lift speed of 0.2 m/s.

Lifting hook in headroom required.

All walls minimum 150RCC or 230 brick.

Hoistway front wall 230 brick preferred.


RCC headroom structural slab150 thick designed to sustain minimum 1000 kg/m2 UDL.

For specific requirements our local representative will be happy to work with you in preparation of the drawings.

Specifications are subject to change without prior notice. Photographs, colour swatches and finishes featured are indicative.

Johnson
LIFTS & ESCALATORS

Hoistway plan

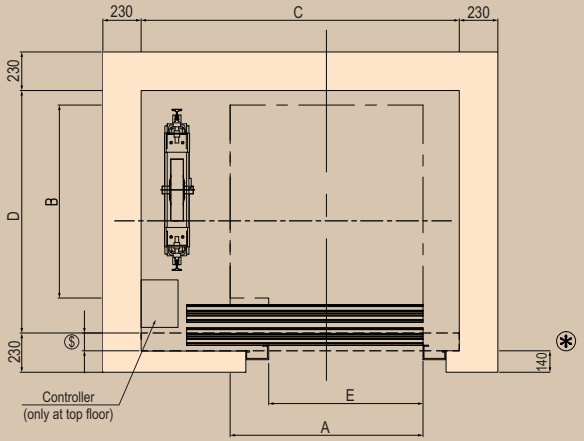

Car Inside		Lift Well		Entrance
A	B	C	D	E
1000	1000	1650	1350	800
900	1150	1500	1500	800

Note: If lift well depth 1500 mm, front wall recess (Ⓢ) 90 mm required and front entrance wall (⊛) thickness 140 mm required. For steel structural shaft, lift well depth of 1590 mm required.

Head Office: 1, East Main Road, Anna Nagar Western Extn., Chennai 101. Ph: 26152200 Fax: 26151614 Email: info@johnsonliftsltd.com Website: www.johnsonliftsltd.com